


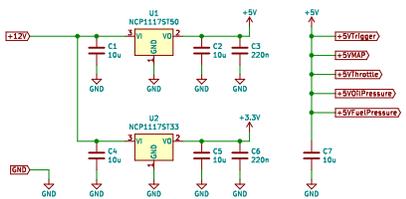























Use 4.7u for all the 10u (voltage rating drops with increasing capacitance).  
Specify Samsung CL31B [capacitance] KA (X7R greater than 1u - 25V) or KB (X7R less than 1u - 50V)



R73 value: 1k to 1.8k

